



**Product technical sheet**

**STEEL 0201-1**




3 - 14 years



5 kids



21,5 m<sup>2</sup>

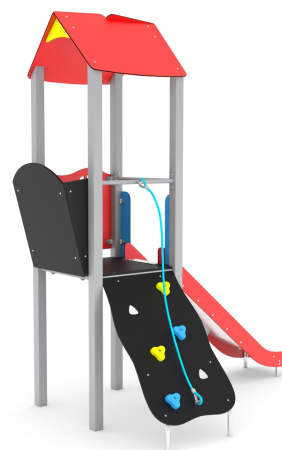

**Material specification**

- Hot-dip galvanized and powder coated or powder galvanized and powder coated steel construction of 80 x 80 mm profile,
- Platforms and climbing walls made of durable anti-slip and waterproof plywood or HPL plate,
- Roofs, side panels made of durable HDPE or HPL plate, resistant to weather conditions,
- Slides made of stainless steel with durable HDPE or HPL side panels,
- Durable climbing stones made of polyester resin composite with mineral fillers,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Hot-dip galvanized and powder coated steel bars,
- Screws covered with plastic caps and/or stainless steel screws,



**Physical development**



sliding



climbing





**1**  
number of towers






**1**  
number of slides



**1**  
number of roofs



**1**  
number of activity elements

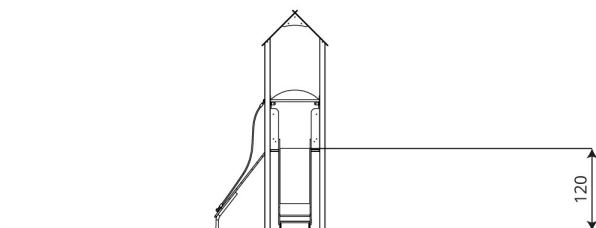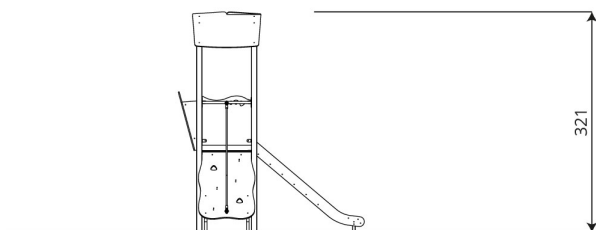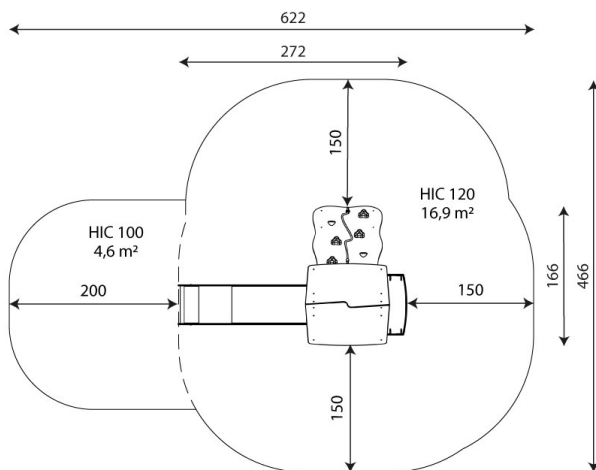

## Product technical sheet

# STEEL 0201-1

### Product data

|                                |               |
|--------------------------------|---------------|
| Length                         | 272 cm        |
| Width                          | 166 cm        |
| Total height                   | 321 cm        |
| Age group                      | 3 - 14 years  |
| Number of users                | 5 kids        |
| Safety zone                    | 21,5 m2       |
| Free fall height               | 120 cm        |
| The height of the platforms    | 120 cm        |
| In accordance with norm EN     | 1176-1:2017   |
| Weight of the heaviest part    | 107 kg        |
| Dimensions of the largest part | 110x370x80 cm |
| Availability of spare parts    | YES           |
| Installation time              | 3 h           |
| Color options                  |               |

Data is subject to change without prior notice.

### Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

### Guarantee

**30**

30 year guarantee - Structural strength of steel and stainless steel components

**15**

15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

**10**

10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

**5**

5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card

Vinci Group Sp. z o.o.  
Seminarnyja 9 Street  
99-400 Łowicz

VAT: 534-250-14-46  
PHONE: +48 42 203 24 99 ext. 26  
M: +48 793 404 991



biuro@vinci-play.com  
info@vinci-play.com  
[www.vinci-play.com](http://www.vinci-play.com)

## Surfaces according to EN 1176-1:2017

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 120                       |

## Product technical sheet

# STEEL 0201-1

### Amount of safe surface corresponding with free fall height:

HIC 100 4,6 m<sup>2</sup>

HIC 120 16,9 m<sup>2</sup>

Data is subject to change without prior notice.

